


Sanitary Tanks

Combo Tank.

The best option to combine with Mono-bloc units. DHW tank with buffer tank. Designed for retrofit applications, the DHW tank with a buffer tank is particularly suitable for fast integration on an existing installation. This tank includes a 3-way valve and an "A" Class pump. Easy to install, nice looking, high efficiency for DHW production and for heating.

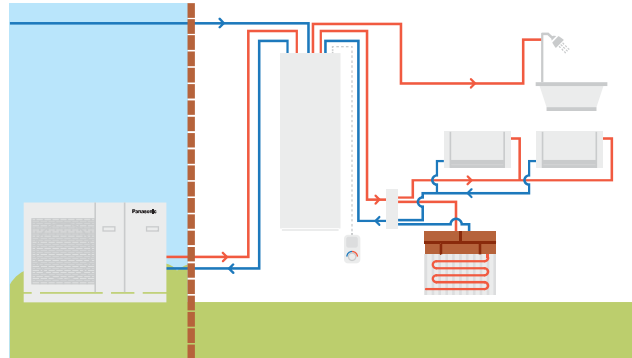

		Enamelled		NEW Stainless steel	
Model		PAW-TD20B8E3-1		PAW-TD23B6E5	
Dimension H x W x D	mm	1770 x 640 x 690		1750 x 600 x 646	
Weight (empty)	kg	150		111	
Volume	L	185 + 80		230 + 60	
Power supply	V, Phase, Hz	230, 1, 50		230, 1, 50	
		Hot water tank		Buffer tank	
Volume	L	185	80	230	60
Max working pressure	MPa (bar)	0,8 (8)	0,6 (6)	1,0 (10)	0,3 (3,0)
Pressure test	MPa (bar)	1,2 (12)	0,9 (9)	1,5 (15)	0,39 (3,9)
Max working temp	°C	90	100	80	80
Connections	mm	Ø22	Ø22	Ø22	Ø22, copper
Material		S 275 JR vitrified	S235 JR	EN 14521	EN 14521
Insulation	Material, t=mm	PUR, 50	PUR 40mm	PUR, 50	PUR, 50
Heating coil surface	m²	2,1	—	1,8	—
Electrical heater	W	3000	—	2800	—
Energy loss at 65°C	kWh/24h	1,3	—	1,25	—
Energy efficiency class (from A+ to F)		B	B	B	A
Standing loss	W	53	46	52	29
Price	€				

1) EU Regulation 812/2013. 2) Tested pursuant to EN 12897:2006. * Enamelled Combo Tank is produced by Lapesa. Stainless Steel Combo Tank is produced by OSO.

